


# Co-efficient of Friction Tester - Digital Cum Computerised (Wintest)

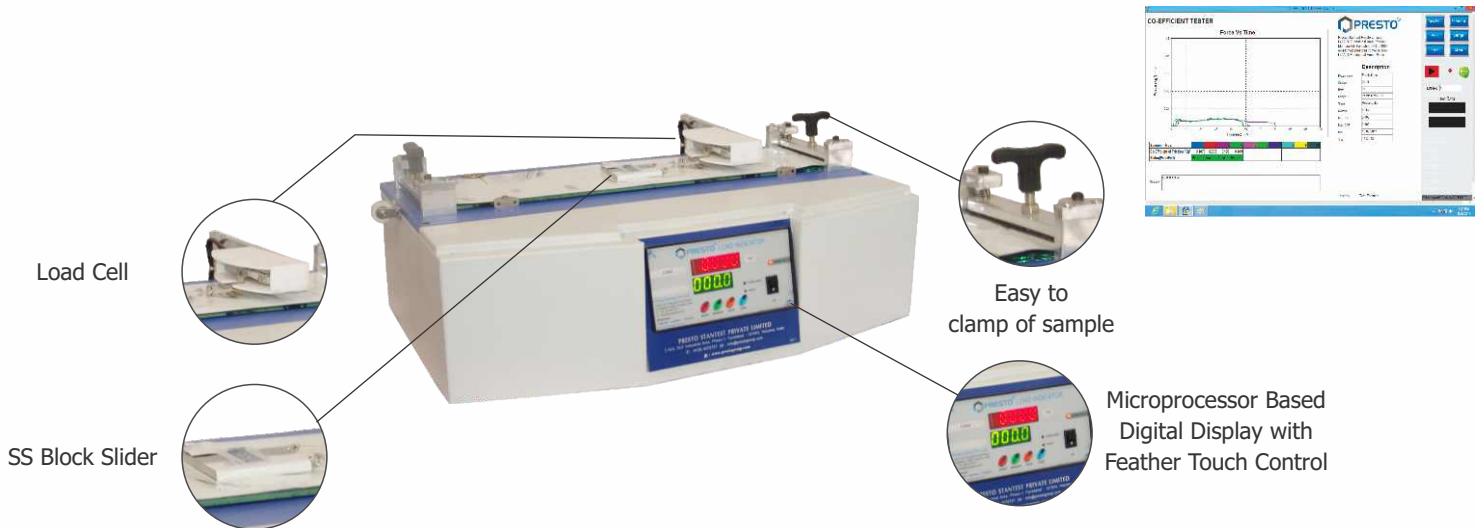

## Model No. PCOF – S03 (C) (Wintest)


**Coefficient of Friction Tester – Digital Cum Computerised** is a consistent tool to indicate the starting and sliding friction of plastic films and sheets when sliding over itself or other substance at specified test condition. PRESTO Coefficient of Friction Tester is manufactured under various Test Standards ASTM D 202, ASTM D 4918, ASTM D 1894, ISO 8295, and TAPPI T 815.

Available in Digital model also.


- Microprocessor based display for accurate test results
- Display for Dynamic and Kinetic Friction
- Highly accurate test results under sliding friction - force.
- Slider Block for performing tests – Sample to Sample, glass or metal
- No slippage in case specimen is tightened uniformly using without any loops.
- Compressive force clamp with spring operated
- Feather touch controls
- Easy Data Management. User can create product identification, test details etc.
- Graph test report is Force Vs Time.
- 10 Sample test reports can be seen on one report
- Email facility of report
- Data can be tabulated in excel format
- Pass/Fail Criteria can be programmed
- Inbuilt hardware/software CD

\*\* Computer & Printer not a part of the supply


Coefficient of friction reveals the stack ability of plastic films. Friction could result from uneven film thickness which leads to uneven film strength. Coefficient of friction tester tells about the degree of abuse a plastic film will sustain without damaging the contents.



Top View

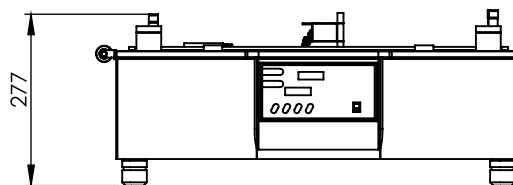

Front View

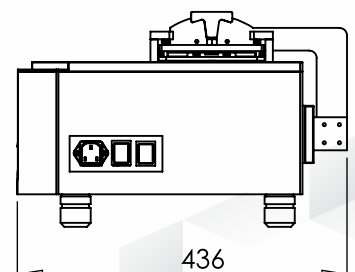

Side View

### Key Specifications:

Load Cell Capacity	3 Kgf
Display	<ul style="list-style-type: none"> <li>• LED (Digital)</li> <li>• Graphical</li> </ul>
Accuracy	± 2% at full load (with master load)
Least Count/Resolution	3 gm
Power	220V , Single phase, 50 Hz
Speed	150 ± 30 mm/min
Motor	15 kg/cm <sup>2</sup> torque, 60rpm
Communication Port	RS 232

### Highlights:

Test block weight	200 gm ± 10gm
Peak Hold Facility	Yes
Sample report with Graph	10 sample tests report in one report
Safety Switch	Yes
Material	Mild Steel
Finish	Powder coated Havel Gray & Blue combination finish and bright chrome / zinc plating for corrosion resistant finish
Dimensions	688X436X277 mm

The Coefficient of Friction tester measures the sliding friction. User can calculate the Coefficient of Dynamic and Static Friction after reading the displayed load value.

### Optional Features:

- Digital models also available.

Thank you customers for choosing us as your partners in growth !



\*All the above logos are the sole property of their respective owners and are used purely for depiction purposes only.

### OUR OTHER PRODUCTS :-



### Head Office : Presto Stantest Private Limited

I-42, DLF Industrial Area Phase-I, Delhi Mathura Road, Faridabad 121003, Haryana, India  
 P : +91 129 4272727 E : info@prestogroup.com

### Branches :

#### Mumbai

503-504B, Fair link Centre, Opp. Fame Adlab  
 Behind Mongini's Off Link Road  
 Andheri (West), Mumbai 400058  
 P : +91 022 42957052, 42957053  
 E : west@prestogroup.com

#### Kolkata

93, 3<sup>rd</sup> Floor, Karnani Estate  
 209, A.J.C. Bose Road  
 Kolkata-700017. West Bengal  
 P : +91 033 40612012  
 E : east@prestogroup.com

#### Chennai

A-3, First Floor, Sri Sathya Sai Building  
 755, Poonamallee High Road, Kilpauk  
 Chennai- 600 010. Tamil Nadu  
 P : +91 044 43865260, 43838372  
 E : south@prestogroup.com

